



Shin-Etsu Inter-Connector[®]

DM TYPE

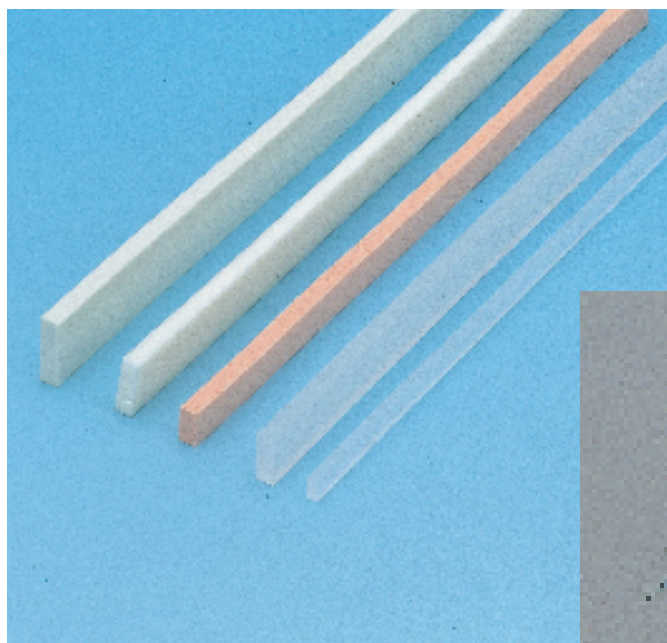


FEATURES

DM-type Inter-Connector is made up of silicone rubber and used as a protective presser foot or a spacer. The material, hardness, or additional specification (with adhesive/adhesive tape) can be custom-made.

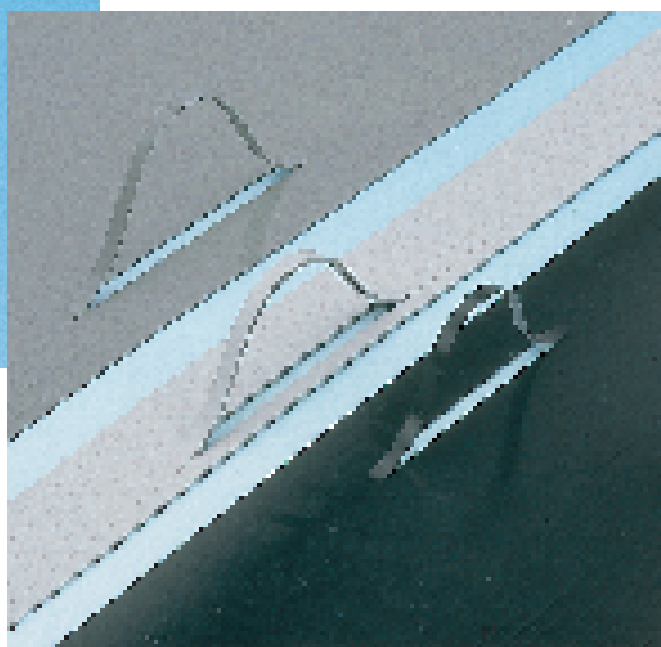

OUTLINE DIMENSIONS

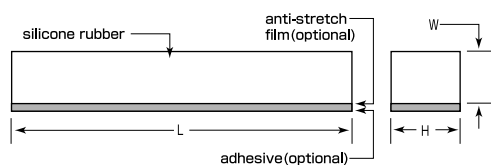

MATERIAL, DIMENSIONS

Item	Unit	SS-20 type	SS-50 type	W-70 type	SPH-151 type
Colour tone		Translucent · Gray · Black	Translucent · Gray · Black	White · Gray	White
Shore hardness A		20°	50°	70°	8°
Silicone rubber		Solid insulative	Solid insulative	Solid insulative	Sponge insulative
Remarks		Counterpart of SS-type			
Length	mm	1.0~370.0	1.0 ~ 370.0	1.0~290.0	1.0~370.0
Height	mm	1.0~250.0	1.0 ~ 250.0	1.0~250.0	1.0~250.0
Width	mm	0.2~6.0	0.2~ 6.0	0.3~5.0	0.8~5.0
Item	Unit	SPO-951 type	UL-50 type	NA-50B type	VO-50 type
Colour tone		Pink · Black	Light Gray	Gray	Black
Shore hardness A		20°	50°	50°	50°
Silicone rubber		Sponge insulative	Silicone rubber	Silicone rubber	Silicone rubber
Remarks		Counterpart of SG-type	Flame resistance	Tape	Tape
Length	mm	1.0~370.0	1.0 ~ 370.0	1.0~400.0	1.0~ 400.0
Height	mm	1.0~250.0	1.0 ~ 250.0	1.0~250.0	1.0~250.0
Width	mm	0.4~6.0	0.2 ~ 6.0	0.1~ 0.5	0.1~0.5

*H≥W/2

Shin-Etsu Inter-Connector has been registered in European Community, TM No. 000299016, and in the United States of America, TM No. 2078941.

BASIC PROPERTIES AND MATERIAL TOLERANCES

Item	Unit	SS-20	SS-50	W-70	SPH-151
Specific gravity		1.10	1.15	1.20	0.6
Tensile strength	(Mpa)	2 \leq	6.0 \leq	6.8 \leq	1.8 \leq
Compression set	(%)	300~400	250~400	180~250	350 \leq
Shore hardness A		20 \pm 5	50 \pm 5	70 \pm 5	8 \pm 5
Compression set	(%)	5~15	5~15	5~15	30 \geq
Volume resistivity	(M Ω)	8 \times 10 ¹¹	8 \times 10 ¹¹	1 \times 10 ¹²	1 \times 10 ⁹
Insulation resistance	(Ω)	10 ⁹ \leq	10 ⁹ \leq	10 ⁹ \leq	10 ⁹ \leq
Operating temperature range	($^{\circ}$ C)	-25~85	-25~85	-25~85	-25~85
Dielectric breakdown voltage	kV/mm	23~27	23~27	23~27	20~25

Item	Unit	SPO-951	UL-50	NA-50B	VO-50
Specific gravity		0.7	1.50	1.15	1.30
Tensile strength	(Mpa)	2.8 \leq	4.5 \leq	6.0 \leq	4.5 \leq
Compression set	(%)	250 \leq	350 \leq	250~400	300 \leq
Shore hardness A		20 \pm 5	50 \pm 5	50 \pm 5	50 \pm 5
Compression set	(%)	10~20	40 \geq	5~15	40 \geq
Volume resistivity	(M Ω)	1 \times 10 ⁹	1 \times 10 ¹²	8 \times 10 ¹¹	1 \times 10 ¹²
Insulation resistance	(Ω)	10 ⁹ \leq	10 ⁹ \leq	10 ⁹ \leq	10 ⁹ \leq
Operating temperature range	($^{\circ}$ C)	-25~85	-25~85	-25~85	-25~85
Dielectric breakdown voltage	kV/mm	20~25	23~27	23~27	23~27

Note) Every item or numerical value indicated herein is measured by Shin-Etsu and out of guarantee.
The quality of the connector, which has been already assembled, is out of guarantee.
Please make sure to see about the purpose/conditions of use and practice your own test.
Industrial ownership like patent doesn't guarantee the usage of the connector

Shin-Etsu

Shin-Etsu Polymer Co.,Ltd.

Shin-Etsu Polymer Co.,Ltd.:

3-5 Nihonbashi-honcho 4-chome, Chuo-ku, Tokyo 103-0023, Japan
TEL 81-3-3279-1712 FAX 81-3-3246-2529

Connector Division:

406-1, Yoshinocho 1-chome, Omiya-shi Saitama 330-0031, Japan
TEL 81-48-652-5913 FAX 81-48-652-5919

Shin-Etsu Polymer America Inc.

5600 Mowry School Road Suite 320 Newark, CA 94560, U.S.A.
TEL 1-510-623-1881 FAX 1-510-623-1603

Shin-Etsu Polymer America,Inc.Atlanta Branch:

333 North Point Center East Suite 150 Alpharetta, GA 30022, U.S.A.
TEL 1-770-346-8686 FAX 1-770-346-8750

Shin-Etsu Polymer Europe B.V.:

Groot Bollersweg 10, 5928 NS Venlo, The Netherlands
TEL 31-77-323-6000 FAX 31-77-323-6001

Shin-Etsu Polymer Co.,Ltd.:

Hong Kong Branch

Suite1602, 16/F, Tower 6, China Hong Kong City, 33 Canton Road, Tsim Sha Tsui, Kowloon, Hong Kong
TEL 852-2377-9131 FAX 852-2377-1673

Shin-Etsu Polymer Shanghai Co.,Ltd.:

Section A, Floor 3, 55 Xiya RD, Wai Gao Qiao Free Trade Zone, Shanghai, 200137, China
TEL 86-21-5046-1153 FAX86-21-5046-1665

Shin-Etsu Polymer Co.,Ltd.:

Singapore Branch

360 Orchard Road #12-10, International Building, Singapore 238869
TEL 65-735-0007 FAX65-735-0008

Shin-Etsu Polymer(Malaysia)Sdn,Bhd.:

Lot 52, Japan Sepintas 26/13, Kawasan, Perindustrian Hicom, 4000 Shan Alan, Selangor Darul Ehasan, Malaysia
TEL 60-3-51111161 FAX 60-3-5111181

H400301