

Shin-Etsu Inter-Connector®

GB-E TYPE




FEATURES

GB-E-type Inter-Connector is a compression type, which consists of gold-plated filaments lined in the conductive part and of insulating silicone rubber on both sides. This type connector makes stable connection possible with lower resistance.

GB-E type could replace soldering and also be used for PCBs, which need current capacity.

OUTLINE DIMENSIONS

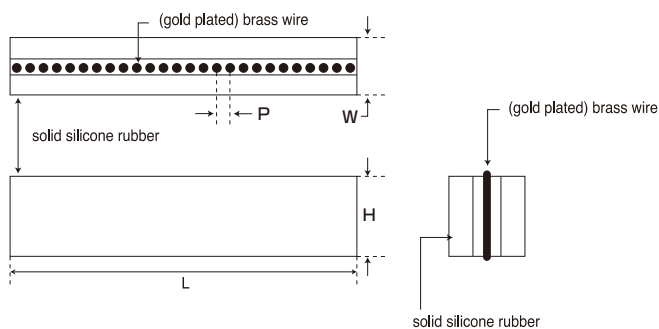

DIMENSIONS AND TOLERANCES

Item		Unit	GB-E type		
Pitch	P	mm	0.05+0.03/-0.01	0.1±0.05	0.2±0.05
Length	L	mm	2.0~ 25.0±0.2	25.1~ 50.0±0.3	
			50.1~ 80.0±0.5	80.1~ 120.0±0.8	
			120.1~ 150.0±1.0	150.1~ 200.0±1.3	
			200.1~ 250.0±1.6		
Height*	H	mm	1.0~ 5.0±0.1	5.1~ 10.0±0.15	10.1~ 20.0±0.2
Width	W	mm	1.0~ 2.4±0.1	2.5~ 4.0±0.15	
Filament diameter		μm	30	40	40

Special design is available on request.

* $H \geq W/2$



Shin-Etsu Inter-Connector has been registered in European Community, TM No. 000299016, and in the United States of America, TM No. 2078941.

BASIC PROPERTIES

Item	Unit	Values
Contact resistance*	Ω	≤ 0.1
Current carrying capacity	mA	500
Insulation resistance(500V DC)	$M\Omega$	$1 \times 10^3 \leq$
Operating temperature range	$^{\circ}\text{C}$	-25 ~ 85

*The test is carried out with Shin-Etsu's own method.

COMPRESSION CURVES

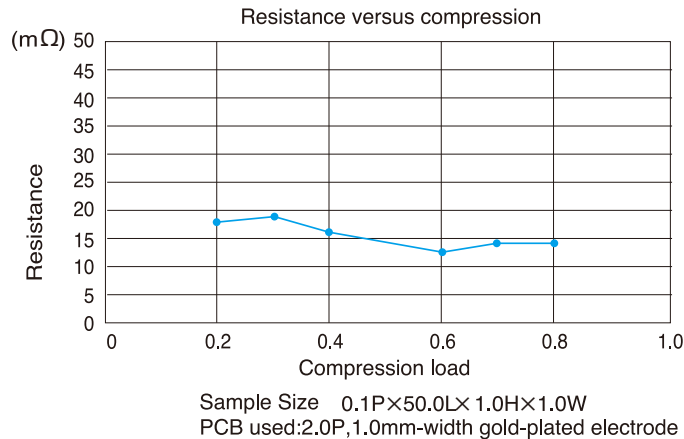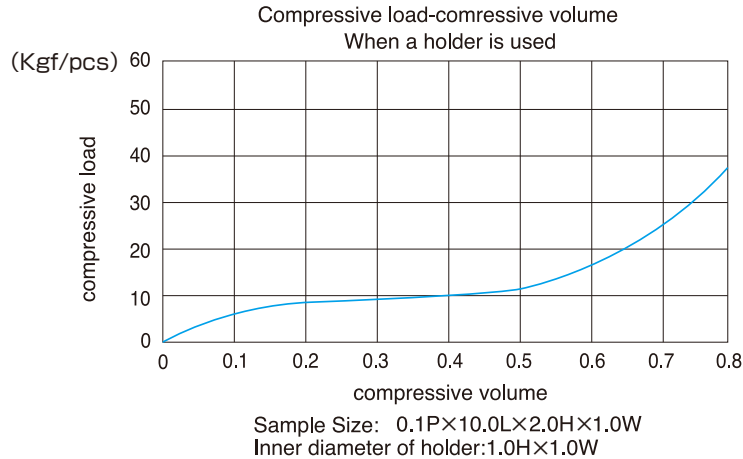

Note) Every item or numerical value indicated herein is measured by Shin-Etsu and out of guarantee.
The quality of the connector, which has been already assembled, is out of guarantee.
Please make sure to see about the purpose/conditions of use and practice your own test.
Industrial ownership like patent doesn't guarantee the usage of the connector

Shin-Etsu

Shin-Etsu Polymer Co.,Ltd.

●Sales Unit Sales & Marketing Division I
TEL: +81-3-5288-8411
Ote Center bldg. 1-1-3 Otemachi, Chiyoda-ku,
Tokyo 100-0004 Japan

●Osaka Branch TEL: +81-6-6350-1121 FAX: +81-6-6350-1288
●Nagoya Branch TEL: +81-52-581-4231 FAX: +81-52-581-2921

●Shin-Etsu Polymer America, Inc.
TEL: +1-510-623-1881 FAX: +1-510-623-1603
●Shin-Etsu Polymer Europe B.V.
TEL: +31-77-323-6000 FAX: +31-77-323-6001
●Shin-Etsu Polymer Hong Kong Co., Ltd.
TEL: +852-2377-9131 FAX: +852-2377-1673
●Shin-Etsu Polymer Singapore Pte. Ltd.
TEL: +65-6735-0007 FAX: +65-6735-0008

●Corporate Head Office
TEL: +81-3-5288-8400
Ote Center bldg. 1-1-3 Otemachi, Chiyoda-ku,
Tokyo 100-0004 Japan